

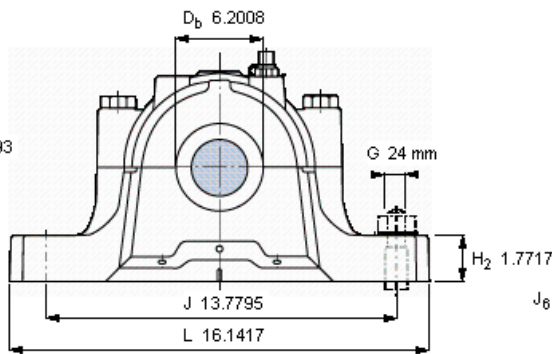


参考资料:<http://www.sozhou.com/p/cf8c7718.html>

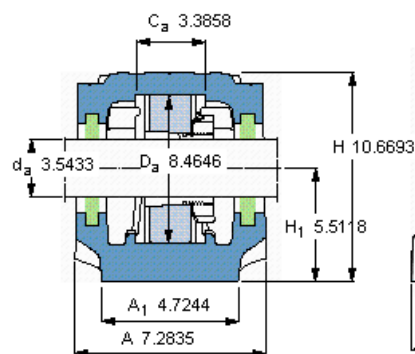

订货型号 仅限轴承座 密封件

SNL 524-620

TSN 620 L



TSN 620 A

2 x TSN 620 S

2 x TSN 620 ND

端盖

ASNH 524-620



适用的SKF轴承和附件

轴承

1320 K
2320 KM
21320 EK
22320 EK
C 2320 K

紧定套

H 320
H 2320
H 320
H 2320
H 2320

定位环

2 x FRB 19,5/215
2 x FRB 6,5/215
2 x FRB 19,5/215
2 x FRB 6,5/215
2 x FRB 6,5/215

有帽螺栓

尺寸 [毫米]

推荐的紧固

扭矩 [Nm]

最大允许负荷 [kN]

F_{120°} 260

F_{150°} 150

F_{180°} 130

适用的固定螺栓

尺寸 [毫米]

推荐的紧固

扭矩 [Nm]

销钉尺寸

径(最大)

中心距离 J₆

中心距离 J₇

M 20x100

200

24

665

0.315

14.8819

1.7323

断裂负荷, 轴承箱, kN

P_{0°} 800

P_{65°} 790

P_{90°} 470


P_{120°} 350

P_{150°} 320

P_{180°} 400

P_a 260

才需要遵守P0°的限制
础面积不受到支持时,
只有在轴承座的整个基



脂量, 公斤

初步填充

重新油脂

1

0,08