


FAG NJ248-E-TB-M1参数

| | | | | |
|--------|---------------|---------|-------|-------------|
| 极限转速 | n_G | 2320 | r/min | 极限转速 |
| 参考转速 | n_B | 1240 | r/min | 参考速度 |
| 疲劳极限载荷 | C_{ur} | 171000 | N | 疲劳极限载荷，径向 |
| 尺寸 | d | 240 | mm | - |
| | D | 440 | mm | - |
| | B | 72 | mm | - |
| | B_1 | 16 | mm | - |
| | B_2 | 27 | mm | - |
| | D_1 | 373 | mm | - |
| | $D_{a\ max}$ | 423 | mm | - |
| | d_1 | 313 | mm | - |
| | $d_{a\ max}$ | 290 | mm | - |
| | $d_{a\ min}$ | 257 | mm | - |
| | $d_{c\ min}$ | 315 | mm | - |
| | F | 293 | mm | - |
| | $r_{l\ min}$ | 4 | mm | - |
| | $r_{a\ max}$ | 3 | mm | - |
| | $r_{al\ max}$ | 3 | mm | - |
| | r_{min} | 4 | mm | - |
| | s | 6 | mm | 距离中心位置的轴向偏移 |
| 重量 | m | 52500 | g | 质量 |
| 基本额定载荷 | C_r | 1140000 | N | 基本额定动载荷，径向 |
| | C_{0r} | 1610000 | N | 基本额定静载荷，径向 |

FAG NJ248-E-TB-M1图片



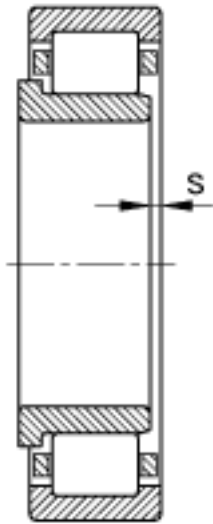

参考资料:<http://www.sozhou.com/p/d171162c.html>