
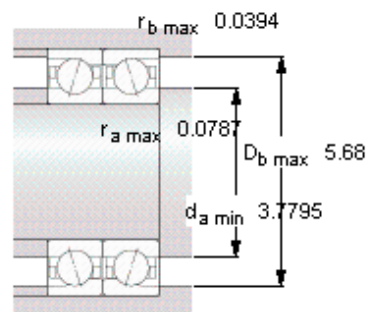
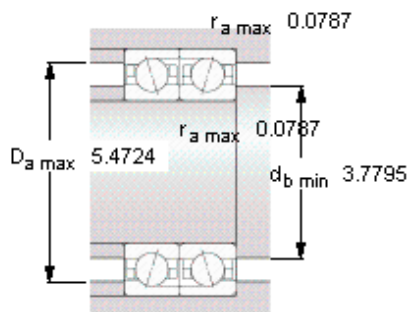



参考资料:<http://www.sozhou.com/p/d362df7f.html>

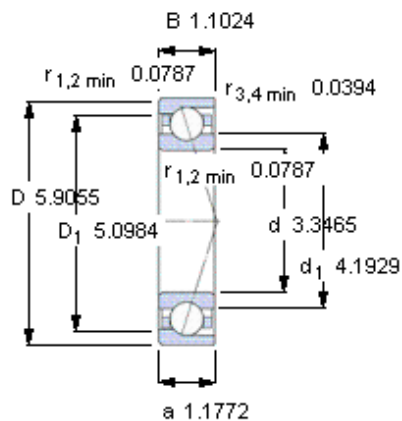

Ball diameter 19,05

Number of balls 17

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
370	740	1480	2960

Static axial stiffness [N/ μ m]

(guideline value)

预载荷等级

A	B	C	D
114	154	215	309

Reference grease quantity [cm³]

G_{ref} 22

计算系数

for equivalent bearing load

f_0 14,9

for preload in mounted bearing sets

f 1,08

f_1 1

f_{2A} 1

f_{2B} 1,01

f_{2C} 1,03

f_{2D} 1,06

f_{HC} 1,01