


SKF 1000X1050X20 HDS1 R参数

主要尺寸	d_1	1000	mm	—
	d_1	1050	mm	—
	b	20	mm	—
设计	设计	HDS1	—	—
密封唇材料	密封唇材料	R	—	—
Pressuredifferential [MPa/psi]	Pressure differential [MPa / psi]	0.1	—	—
型号	型号	1000X1050X20 HDS1 R	—	—
美国图纸编号	美国图纸编号	4133510	—	—

SKF 1000X1050X20 HDS1 R图片

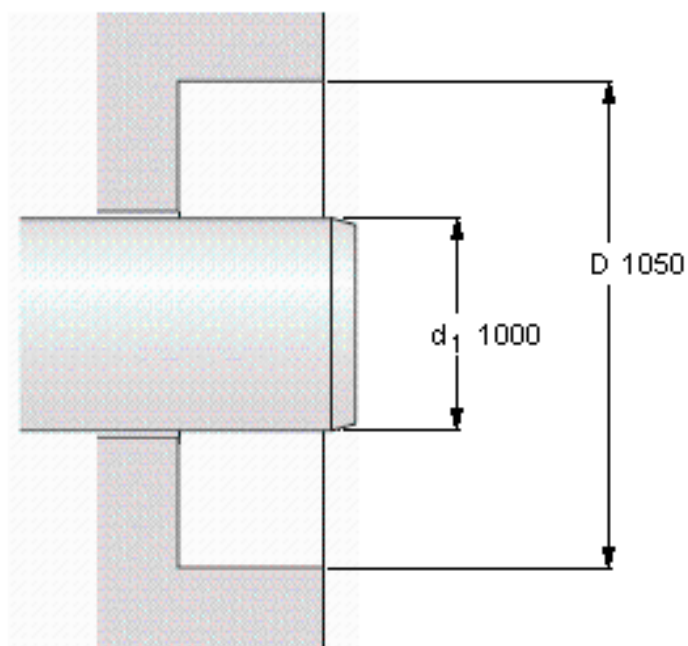

Permissible operating temperature [°C / °F]

最小	最大
-40 / -40	100 / 212
	short periods
	120 / 248



Rotational speed [r/min]

477
at circumferential speed [m/s / ft/s]
25 / 82

Pressure differential [MPa / psi]

0,1 / 14,5

See also "Permissible speeds" and "Chemical and thermal resistance"

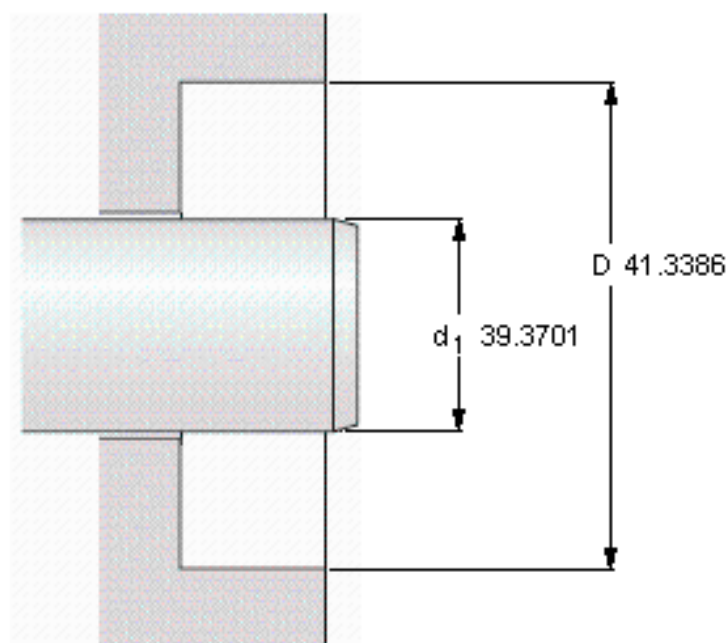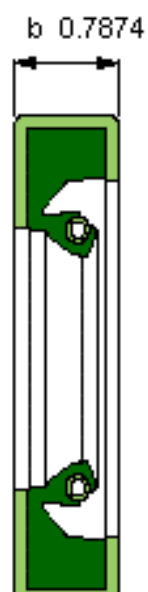

Permissible operating temperature [°C / °F]

最小	最大
-40 / -40	100 / 212
	short periods
	120 / 248

Rotational speed [r/min]

477

at circumferential speed [m/s / ft/s]

25 / 82

Pressure differential [MPa / psi]

0,1 / 14,5

See also "Permissible speeds" and "Chemical and thermal resistance"

参考资料: <http://www.sozhou.com/p/d7201f4e.html>