

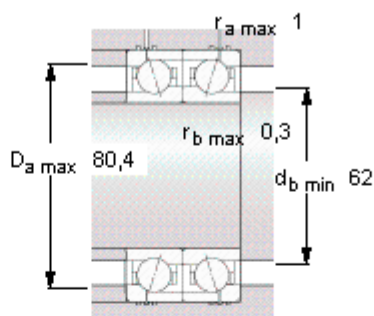



SKF 71912 CE/HCP4AH1参数

主要尺寸	d	60	mm	—
	D	85	mm	—
	B	13	mm	—
基本额定载荷	C	16300	N	动载荷
	C_0	11800	N	静载荷
疲劳载荷极限	P_u	500	N	—
可达转速	Grease	26000	r/min	—
	Oil-air	40000	r/min	—
重量	重量	160	g	—
型号	型号	71912 CE/HCP4AH1	—	—

SKF 71912 CE/HCP4AH1图片

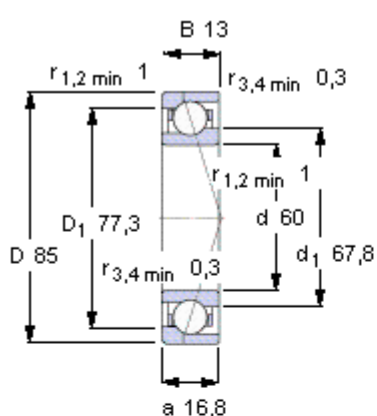

Ball diameter 7,938

Number of balls 23

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
87	262	523	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
52	81	111	-

Reference grease quantity [cm³]

G_{ref} 2,5

计算系数

for equivalent bearing load

f_0 8,5

for preload in mounted bearing sets

f 1,13

f_1 1

f_{2A} 1





f_{2B} 1,05

f_{2C} 1,09

f_{2D} -

f_{HC} 1,01

参考资料: <http://www.sozhou.com/p/df20d261.html>

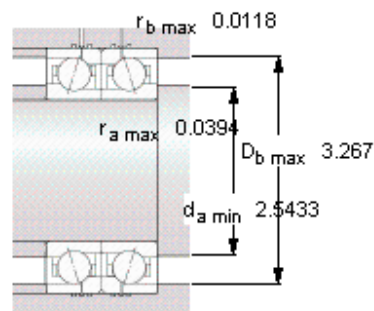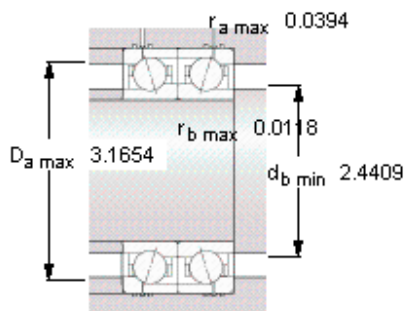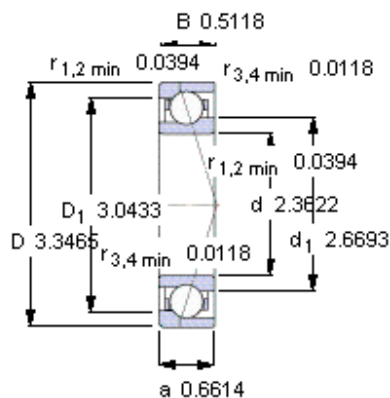

Ball diameter 7,938

Number of balls 23

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
87	262	523	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
52	81	111	-

Reference grease quantity [cm³]

G_{ref} 2,5

计算系数

for equivalent bearing load

f₀ 8,5

for preload in mounted bearing sets

f 1,13

f₁ 1

f_{2A} 1

f_{2B} 1,05

f_{2C} 1,09

f_{2D} -

f_{HC} 1,01