
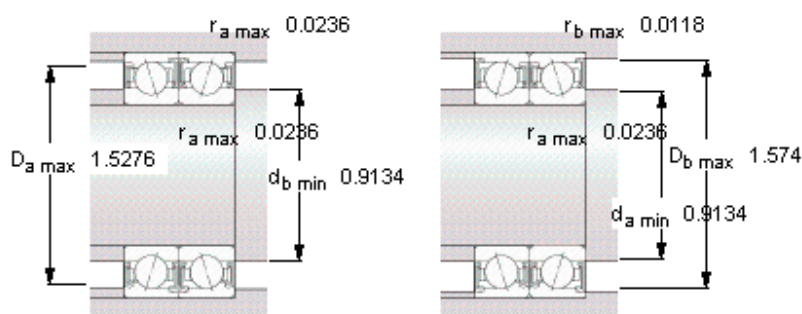


THC 1.02

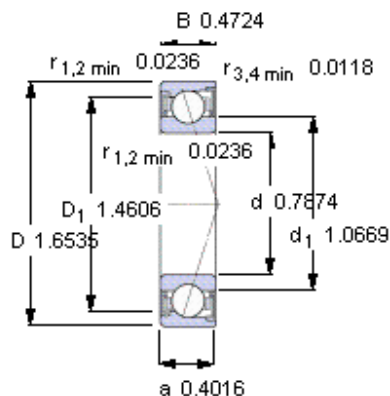

Ball diameter 6,35

Number of balls 12

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
35	70	140	280

Static axial stiffness [N/ μ m]

(guideline value)

预载荷等级

A	B	C	D
25	34	46	65

Reference grease quantity [cm³]

G_{ref} -

计算系数

for equivalent bearing load

f_0 9,2

for preload in mounted bearing sets

f 1,03

f_1 1

f_{2A} 1

f_{2B} 1,02

f_{2C} 1,05

f_{2D} 1,09

f_{HC} 1,02