
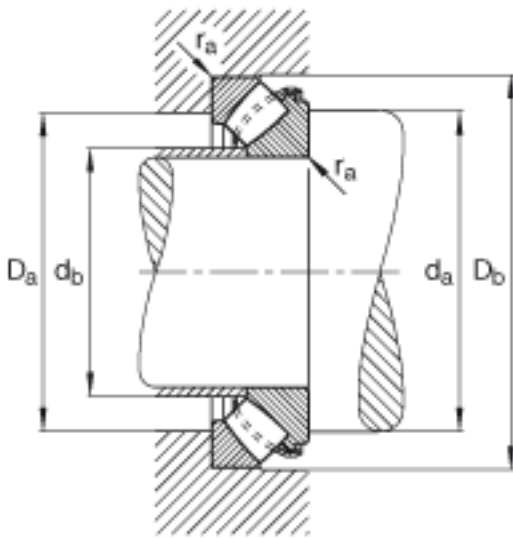


### FAG 29317-E1参数

尺寸	d	85	mm	-
	D	150	mm	-
	T	39	mm	-
	A	50	mm	-
	D <sub>1</sub>	109.5	mm	-
	D <sub>a max</sub>	129	mm	-
	D <sub>b min</sub>	153	mm	-
	d <sub>1</sub>	138.5	mm	-
	d <sub>a min</sub>	120	mm	-
	d <sub>b max</sub>	92	mm	-
	r <sub>a max</sub>	1.5	mm	-
	r <sub>min</sub>	1.5	mm	-
	T <sub>1</sub>	20	mm	-
	T <sub>3</sub>	24.5	mm	-
	T <sub>5</sub>	34.5	mm	-
重量	m	2700	g	质量
基本额定载荷	C <sub>a</sub>	420000	N	基本额定动载荷, 轴向
	C <sub>0a</sub>	1110000	N	基本额定静载荷, 轴向
极限转速	n <sub>G</sub>	4850	r/min	极限转速
参考转速	n <sub>B</sub>	2270	r/min	参考速度
疲劳极限载荷	C <sub>ua</sub>	156000	N	疲劳极限载荷, 轴向

### FAG 29317-E1图片

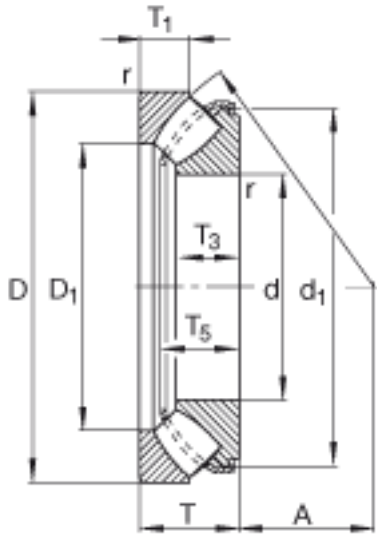

参考资料:<http://www.sozhou.com/p/f89b8d5a.html>

