


SKF 25x42x7 HMSA10 RG参数

主要尺寸	d ₁	25	mm	—
	d1	42	mm	—
	b	7	mm	—
设计	设计	HMSA10	—	—
密封唇材料	密封唇材料	RG	—	—
Pressuredifferential [MPa/psi]	Pressure differential [MPa / psi]	0.03		—
型号	型号	25x42x7 HMSA10 RG	—	—
美国图纸编号	美国图纸编号	692317	—	—

SKF 25x42x7 HMSA10 RG图片

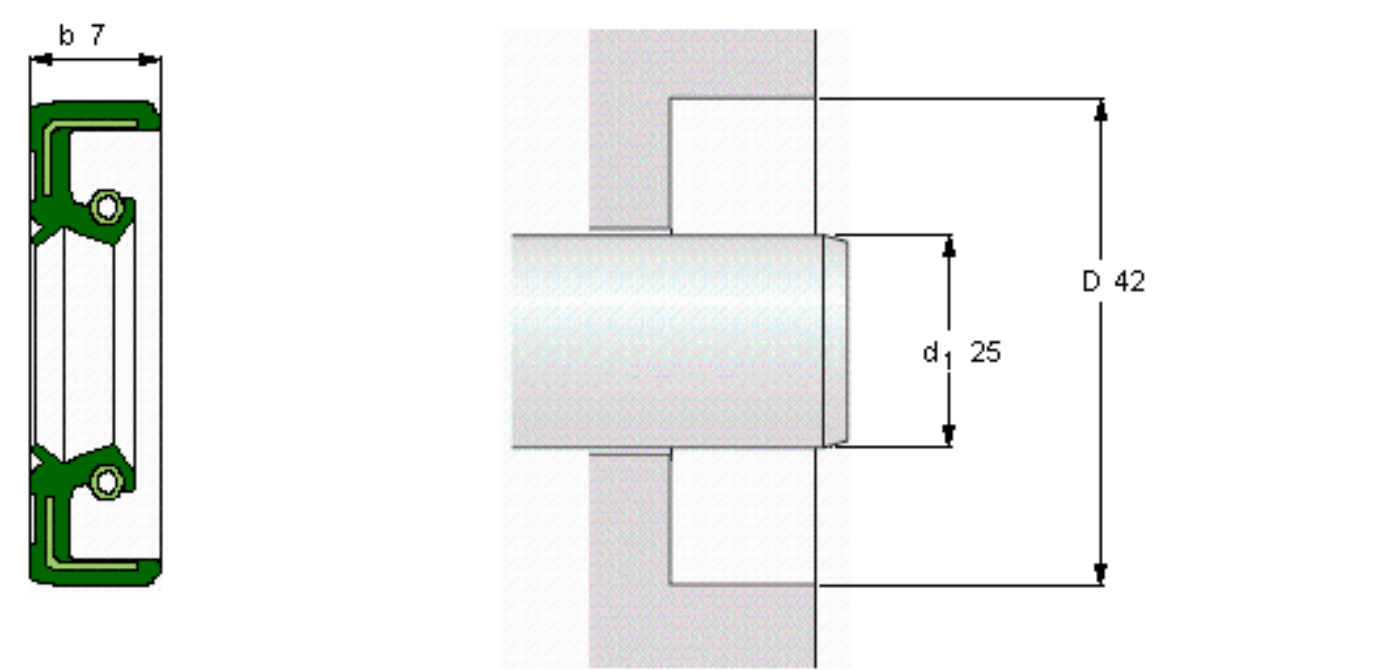

Permissible operating temperature [°C / °F]

最小	最大
-40 / -40	100 / 210
	short periods
	120 / 250



Rotational speed [r/min]

10695
at circumferential speed [m/s / ft/s]
14 / 45,92

Pressure differential [MPa / psi]

0,03 / 5

See also "Permissible speeds" and "Chemical and thermal resistance"

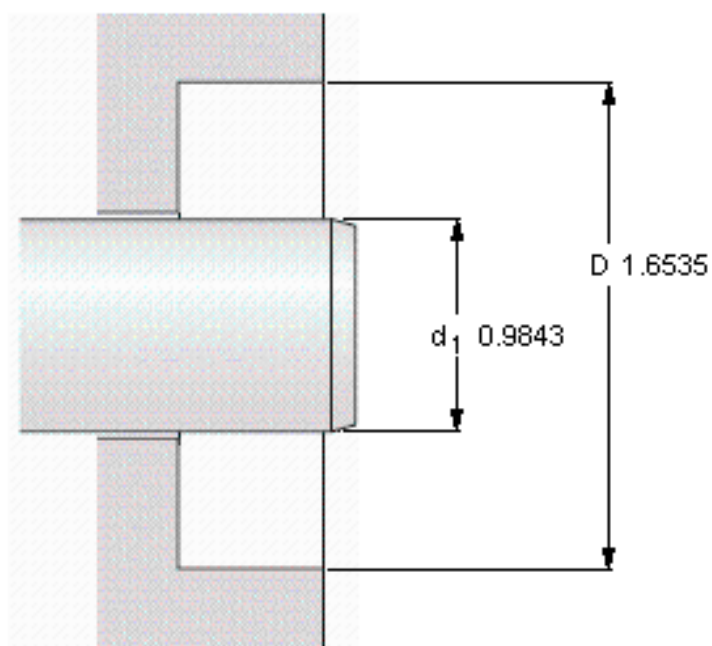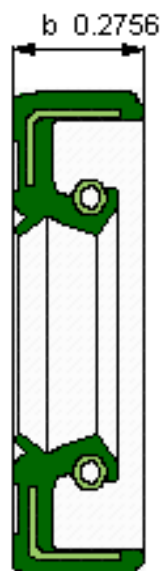

Permissible operating temperature [°C / °F]

最小	最大
-40 / -40	100 / 210
	short periods
	120 / 250

Rotational speed [r/min]

10695

at circumferential speed [m/s / ft/s]

14 / 45,92

Pressure differential [MPa / psi]

0,03 / 5

See also "Permissible speeds" and "Chemical and thermal resistance"

参考资料:<http://www.sozhou.com/p/feea2310.html>