
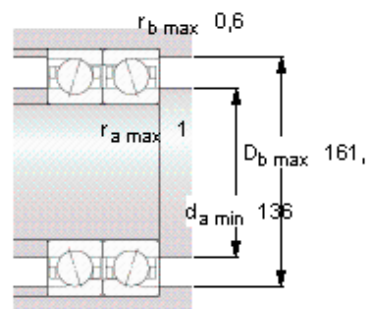
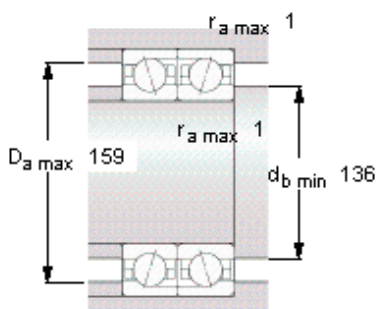



SKF 71826 CD/HCP4参数

主要尺寸	d	130	mm	—
	D	165	mm	—
	B	18	mm	—
基本额定载荷	C	39000	N	动载荷
	C_0	53000	N	静载荷
疲劳载荷极限	P_u	1860	N	—
可达转速	Grease	8500	r/min	—
	Oil-air	13000	r/min	—
重量	重量	700	g	—
型号	型号	71826 CD/HCP4	—	—

SKF 71826 CD/HCP4图片

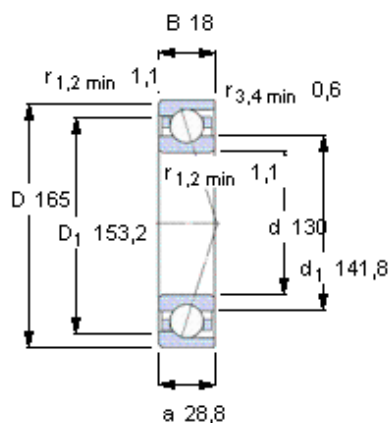

Ball diameter 9,525

Number of balls 35

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
155	455	910	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
132	224	329	-

Reference grease quantity [cm³]

G_{ref} 9,3

计算系数

for equivalent bearing load

f_0 17,3

for preload in mounted bearing sets

f 1,34

f_1 1

f_{2A} 1





f_{2B} 1,1

f_{2C} 1,18

f_{2D} -

f_{HC} 1,02

参考资料: <http://www.sozhou.com/p/351bf4f9.html>

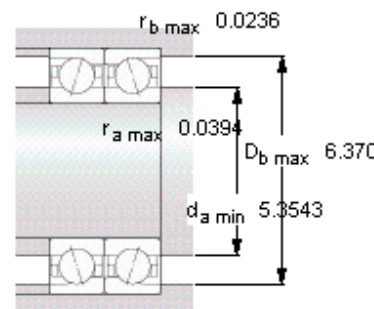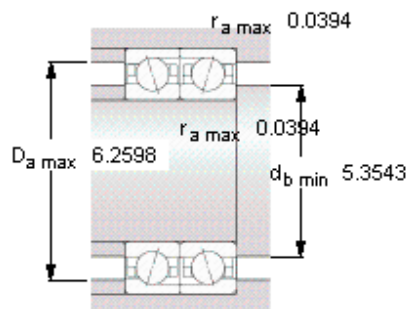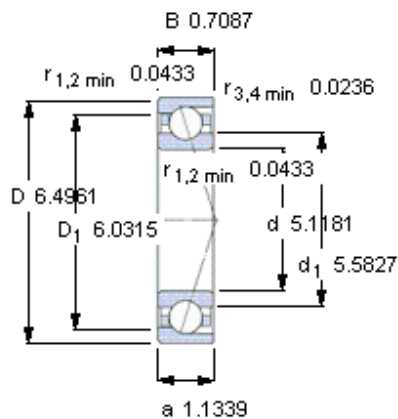

Ball diameter 9,525

Number of balls 35

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
155	455	910	-

Static axial stiffness [N/ μ m]

(guideline value)

预载荷等级

A	B	C	D
132	224	329	-

Reference grease quantity [cm³]

G_{ref} 9,3

计算系数

for equivalent bearing load

f_0 17,3

for preload in mounted bearing sets

f 1,34

f_1 1

f_{2A} 1

f_{2B} 1,1

f_{2C} 1,18

f_{2D} -

f_{HC} 1,02