



NSK FCJBE-90参数

|         |      |          |       |        |
|---------|------|----------|-------|--------|
| 型号      | 型号   | FCJBE-90 |       | -      |
| 外形尺寸    | D    | 90       | mm    | 外径     |
|         | C    | 35       | mm    | 宽度     |
|         | SD   | 30       | mm    | 外径     |
| 尺寸      | G    | M30x1.5  | mm    | 螺栓     |
|         | G1   | 32       | mm    | -      |
|         | B1   | 100      | mm    | -      |
|         | B2   | 63.0     | mm    | -      |
|         | B3   | 15       | mm    | -      |
|         | M2   | 4        | mm    | -      |
|         | M1   | 8        | mm    | -      |
|         | R    | 1.0      | mm    | (最小)   |
| 基本额定载荷  | CR   | 39000    | N     | 动载荷    |
| 极限载荷    | PMAX | 61000    | N     | 极限载荷   |
| 滚轮极限载荷  | LTL  | 59000    | N     | 滚轮极限载荷 |
| 重量      | MASS | 1950     | g     | 重量     |
| 六角形孔的尺寸 | X    | 17.0     | mm    | 双边距离   |
| 偏心轴衬尺寸  | B4   | 31.0     | mm    | -      |
|         | SD1  | 40       | mm    | -      |
|         | E    | 1.5      | mm    | -      |
| 挡肩尺寸    | F    | 52.0     | mm    | (最小)   |
| 拧紧力矩    | TT   | 30500    | n. cm | (最大)   |

NSK FCJBE-90图片

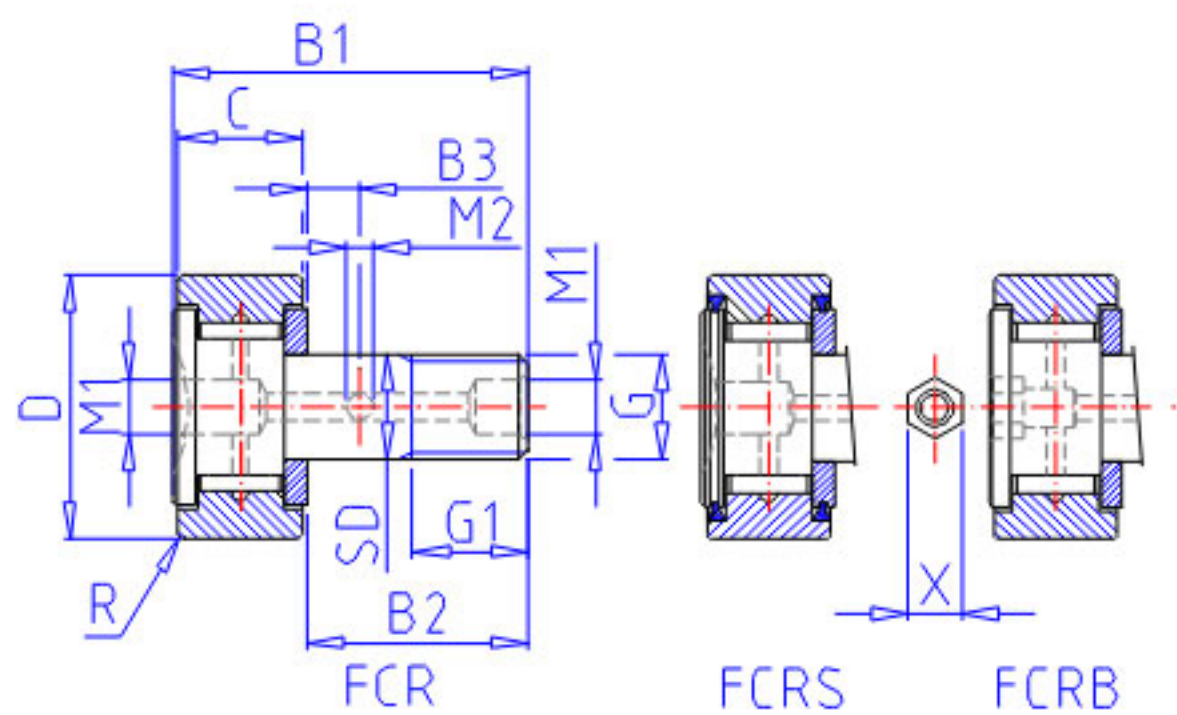

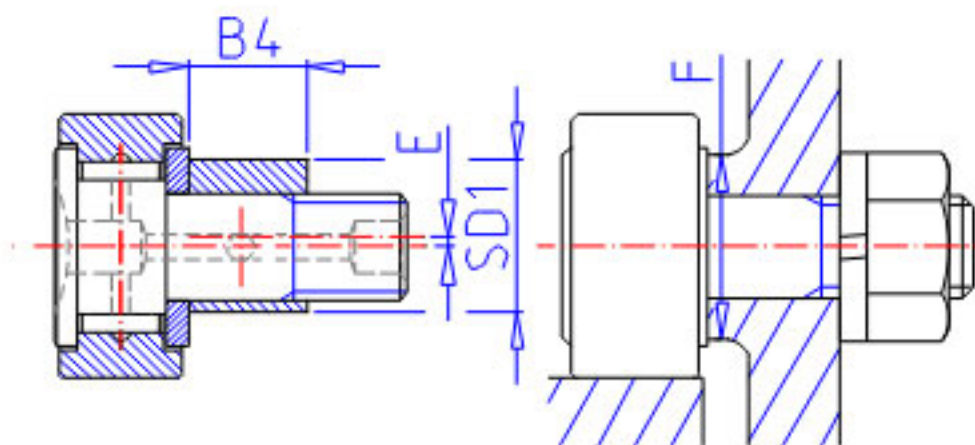

FCRE

参考资料:<http://www.sozhou.com/p/1c5db244.html>

