


FAG NJ2211-E-TVP2 + HJ2211-E参数

尺寸	d	55	mm	-
	D	100	mm	-
	B	25	mm	-
	B ₁	6	mm	-
	B ₂	10	mm	-
	D ₁	86.6	mm	-
	D _{a max}	91	mm	-
	d ₁	70.8	mm	-
	d _{a max}	65	mm	-
	d _{a min}	62	mm	-
	r _{min}	1.5	mm	-
	s	1.3	mm	距离中心位置的轴向偏移
	说明		HJ2211-E	
重量	m	812	g	质量
	m ₁	87	g	质量, L 型圈
基本额定载荷	C _r	117000	N	基本额定动载荷, 径向
	C _{0r}	118000	N	基本额定静载荷, 径向
极限转速	n _G	8700	r/min	极限转速
参考转速	n _B	4750	r/min	参考速度
疲劳极限载荷	C _{ur}	20600	N	疲劳极限载荷, 径向
尺寸	d _{c min}	73	mm	-
	E	90	mm	-
	F	66	mm	-
	r _{1 min}	1.1	mm	-
	r _{a max}	1.5	mm	-
	r _{a1 max}	1	mm	-

FAG NJ2211-E-TVP2 + HJ2211-E图片

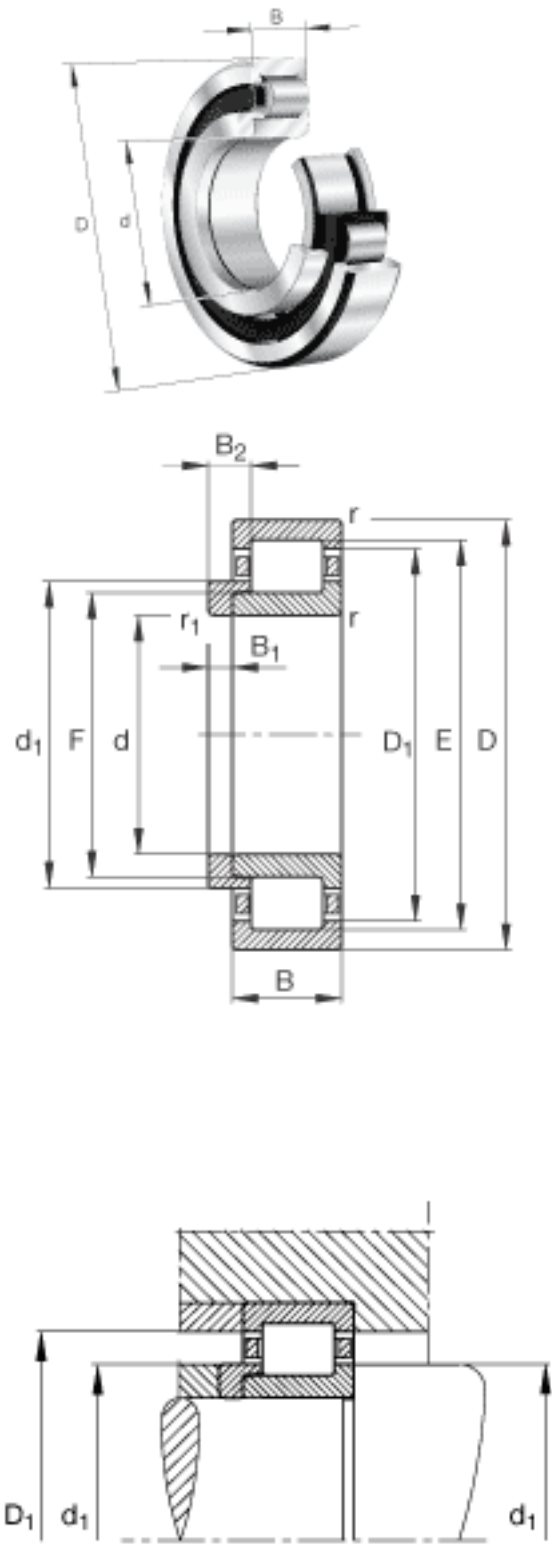

参考资料:<http://www.sozhou.com/p/7b44c644.html>

