


## NTN NUP252参数

|        |       |         |       |      |
|--------|-------|---------|-------|------|
| 主要尺寸   | SD    | 260     | mm    | —    |
|        | D     | 480     | mm    | 外径   |
|        | B     | 80      | mm    | 宽度   |
|        | R     | 5.0     | mm    | (最小) |
|        | R1    | 5.0     | mm    | (最小) |
| 型号     | ORDER | NUP252  |       | 型号   |
| 基本额定载荷 | CR    | 1150000 | N     | 动载荷  |
|        | COR   | 1660000 | N     | 静载荷  |
|        | CRF   | 117 000 | kgf   | 动载荷  |
|        | CORF  | 170 000 | kgf   | 静载荷  |
| 极限转速   | LSG   | 1 300   | r/min | 脂润滑  |
|        | LSO   | 1 600   | r/min | 油润滑  |
| 尺寸     | FW    | 320.0   | mm    | —    |
|        | EW    | 420.0   | mm    | —    |
|        | J     | 340.0   | mm    | —    |
| 重量     | MASS  | 66900   | g     | 重量   |
| 安装尺寸   | DA1   | 280     | mm    | (最小) |
|        | DB1   | 280     | mm    | (最小) |
|        | DC    | 318     | mm    | (最大) |
|        | DD    | 323     | mm    | (最小) |
|        | DE    | 343     | mm    | (最小) |
|        | DA    | 460     | mm    | (最大) |
|        | DB2   | 460     | mm    | (最大) |
|        | DB3   | 426     | mm    | (最小) |
|        | RAS   | 4       | mm    | (最大) |
|        | R1AS  | 4       | mm    | (最大) |

## NTN NUP252图片

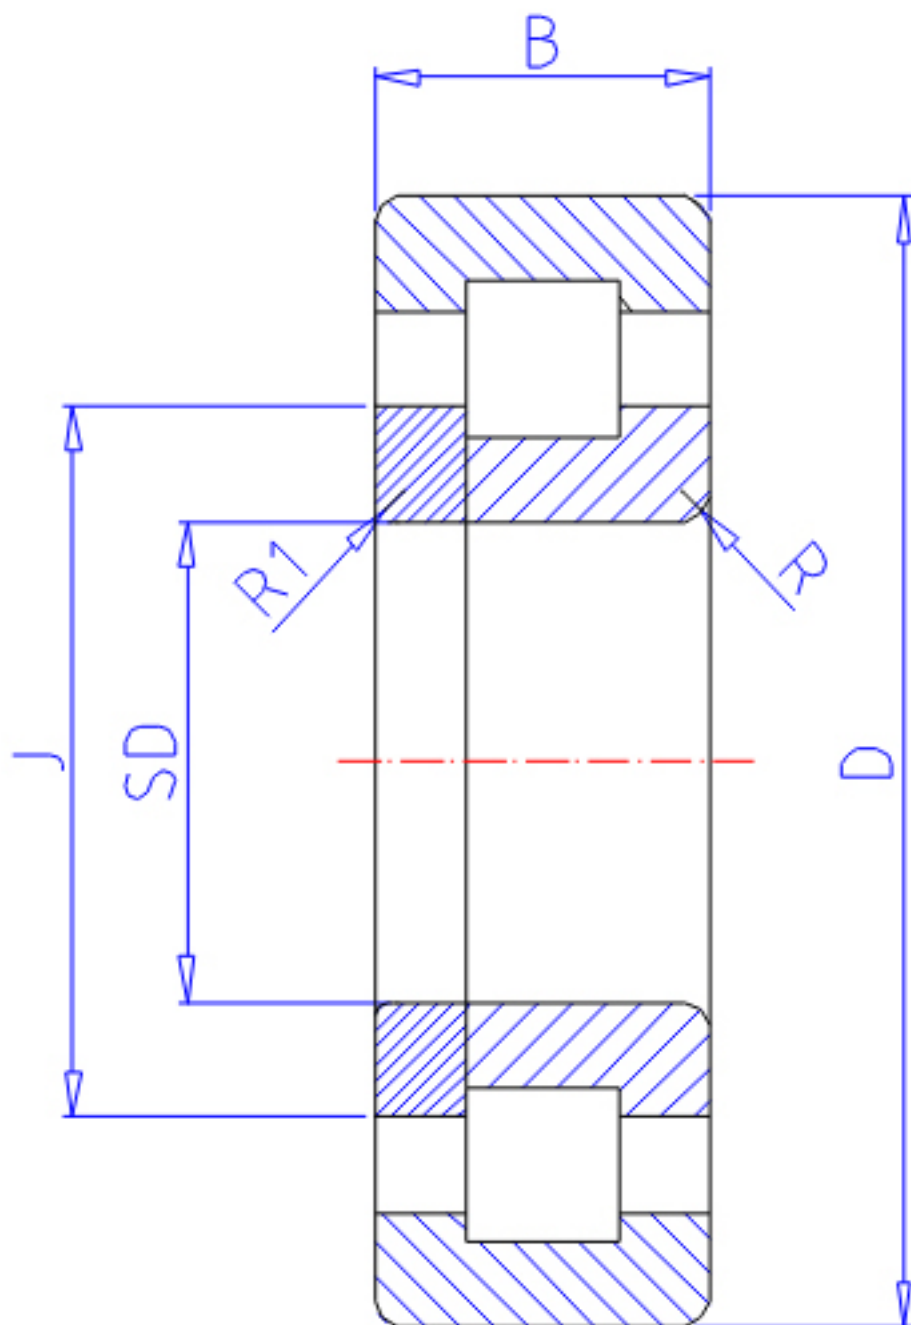

参考资料:<http://www.sozhou.com/p/84b20fd0.html>

